

IC 150C

INTERMITTENT CARTONING MACHINE



IC 150C is the enhanced version of IC 150 with higher speeds. Continuous R&D at IMA-PG has led to development of this model with 20% higher speed than IC 150.

The IC 150C can be used for the cartoning of pharmaceutical, Chemical, cosmetic and food products.

The pre glued cartons are loaded into a magazine which is easily accessible to the operator, and then picked up and positively opened by means of a suction cup working in phase with the conveyor system. The cartoner can handle straight or reverse tuck in cartons, or cartons with hot melt glued flaps.

The compact design of IC 150C allows easy operator access to all controls and makes it suitable for installation in space restricted areas.

The size parts and relevant settings are such as to permit the operator to quickly and safely perform size change-over.


The IC 150C can be fitted with a wide range of feeding units which automatically separate and orient the product before it is carefully introduced into the previously opened and erected carton. The PLC automatically controls and manages all packaging steps any malfunction indicated on the display.

Additional accessories like Pharma Bar Code Reader, Online Leaflet Folding Unit, Leaflet Presence Control, Inkjet Printer, etc can be attached, as per request.

IC 150C TECHNICAL DATA



February 2012 - IC 150 Rel.01 EN - 99TQIC20001

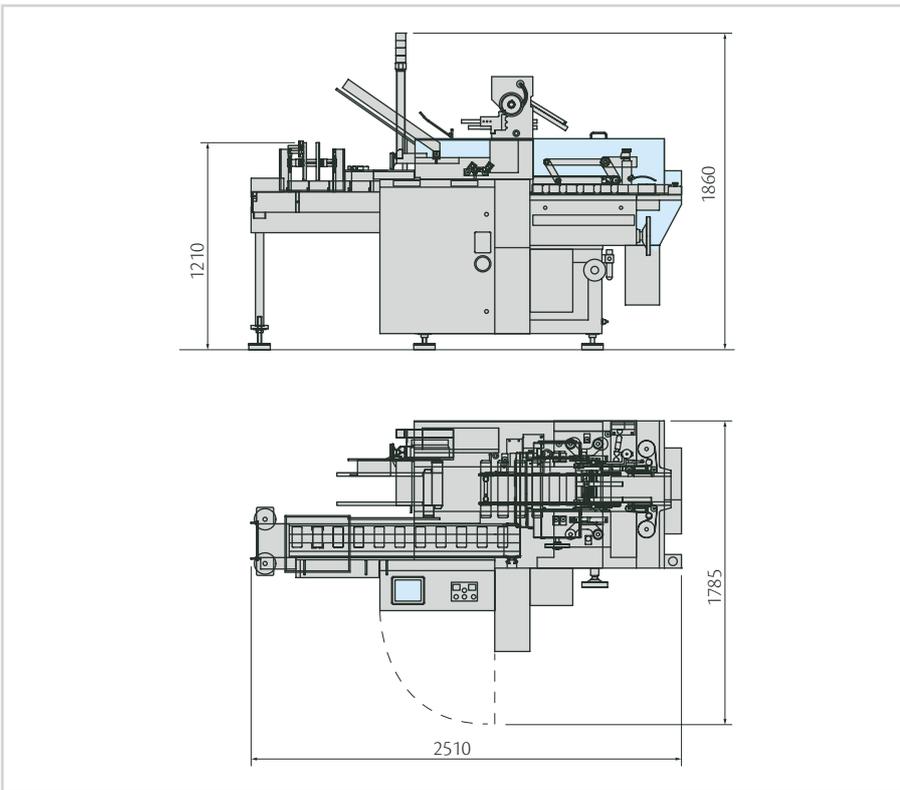

MACHINE CAPABILITIES

- Blister: Automatic blister infeed adjustable magazine
- Bottles: Rotary turn table for bottles, transfer conveyor with contrast guide for bottle orientation from vertical to horizontal & bottle pushing mechanism. Alternate feeding system: Rotary turn table for bottles, transfer conveyor with contrast guide for bottle orientation from vertical to horizontal and bottle shuttle mechanism
- Trays: Tray transfer conveyor with pushing mechanism
- Tubes: Tube transfer conveyor with tube orientation, singling mechanism, pick & place mechanism

CARTON DIMENSIONS		
		OPTIONAL
Width (A)	Min. 28-92 max.	
Height (B)	Min. 12*-60 max.	85
Lenght (C/H)	Min. 55-190 max.	150
A+B	140 max.	160

* CONDITIONS APPLY Based on the carton width, carton length and product thickness.



Machine weight
1200 Kgs



Production output
Up to 120 cycles/min.



CE Certified

IMA-PG India Private Limited

Corporate Office & Factory: Plot No. R-677, MIDC, T.T.C Indl. Area,
Thane Belapur Road, Rabale, Navi Mumbai 400 701, India
Tel. +91 22 67179000 - Fax +91 22 27600888
sales@imapg.com - www.imapg.com - www.ima.it - **www.ima-pharma.com**

IMA-PG India Private Limited reserves the right to make any changes to the described machine characteristics. Pictures shown on the catalogue is for illustration purpose.